TYPES LAB AND LA • 40" AMPERE
AB DE-ION CIRCUIT BREAKER

125-400 amperes • 2 and 3 pole • 600 volts a-c, 250 volts d-c

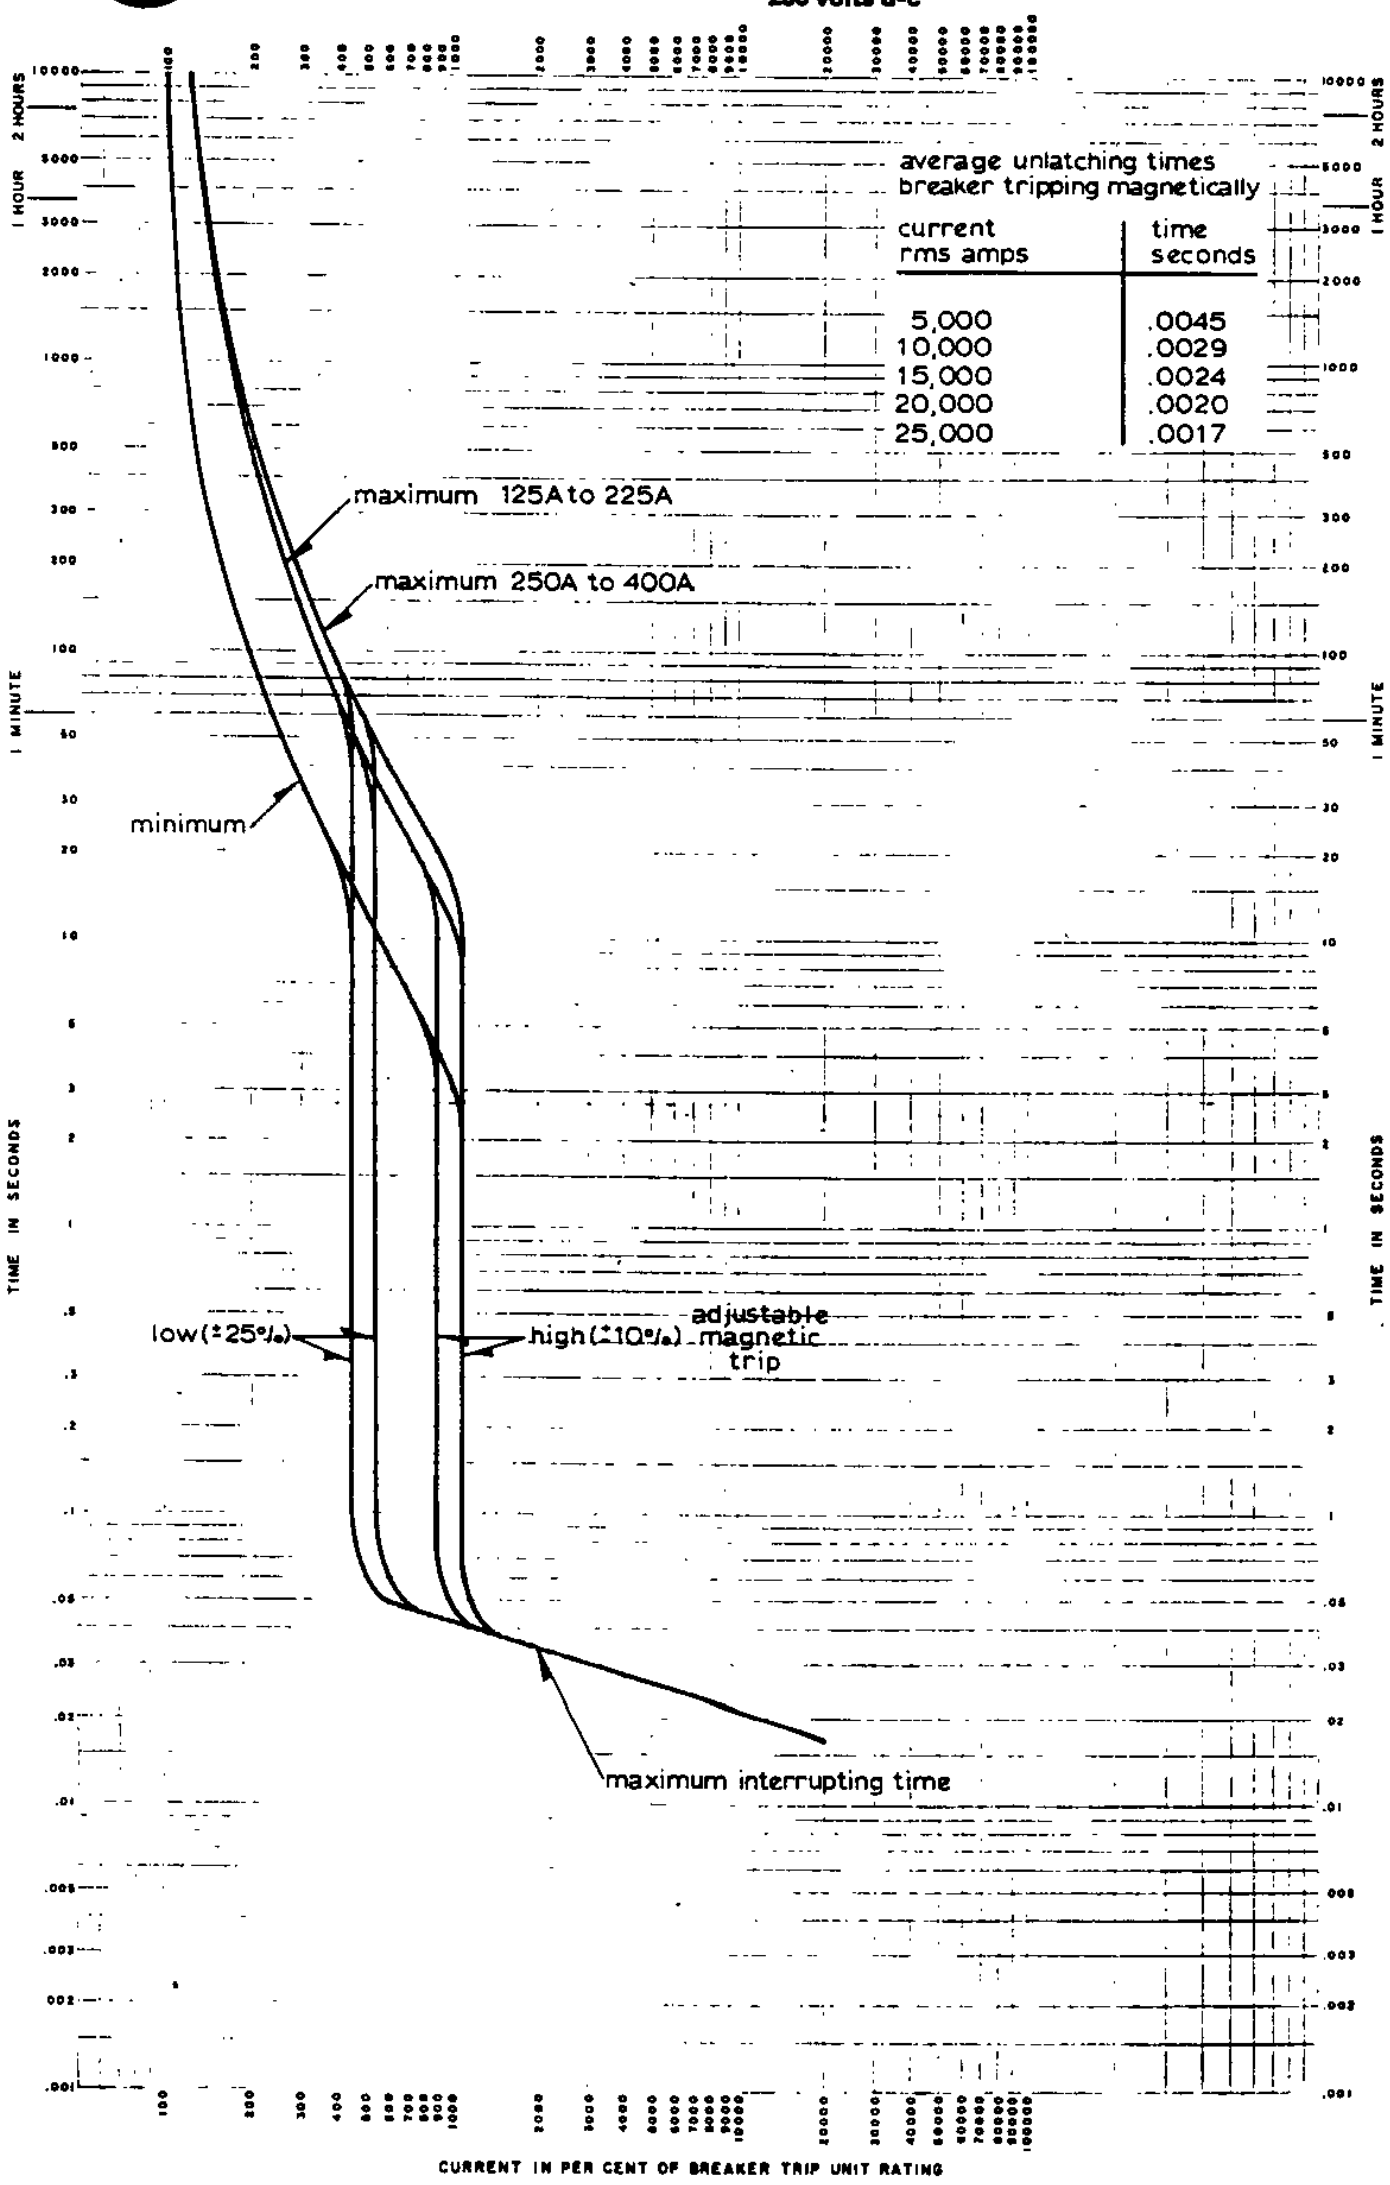

Maximum and Minimum Characteristic Curves
40°C ambient • cold start
Thermal magnetic • Saf-T-Vue
42,000 amperes symmetrical interrupting capacity (240 volts)
30,000 amperes symmetrical interrupting capacity (480 volts)
22,000 amperes symmetrical interrupting capacity (600 volts)

Curve No. SC-6762-67
March 1969

Westinghouse Electric Corporation
Standard Control Division, Beaver, Pa.