LA, LH/MC THERMAL-MAGNETIC MOLDED CASE CIRCUIT BREAKERS CHARACTERISTIC TRIP CURVE NO. 660-17

CIRCUIT BREAKER INFORMATION

Circuit Breaker Prefix/Suffix	Continuous Ampere Rating	Maximum AC Voltage	Number of Poles
LA, LH/MC	400	480	2, 3

This curve is to be used for application and coordination purposes only. The **EZ-AMP** overlay feature at the bottom of the page should be used during coordination studies.

All time/current characteristic curve data is based on 40°C ambient cold start. Terminations are made with conductors of appropriate length and ratings.

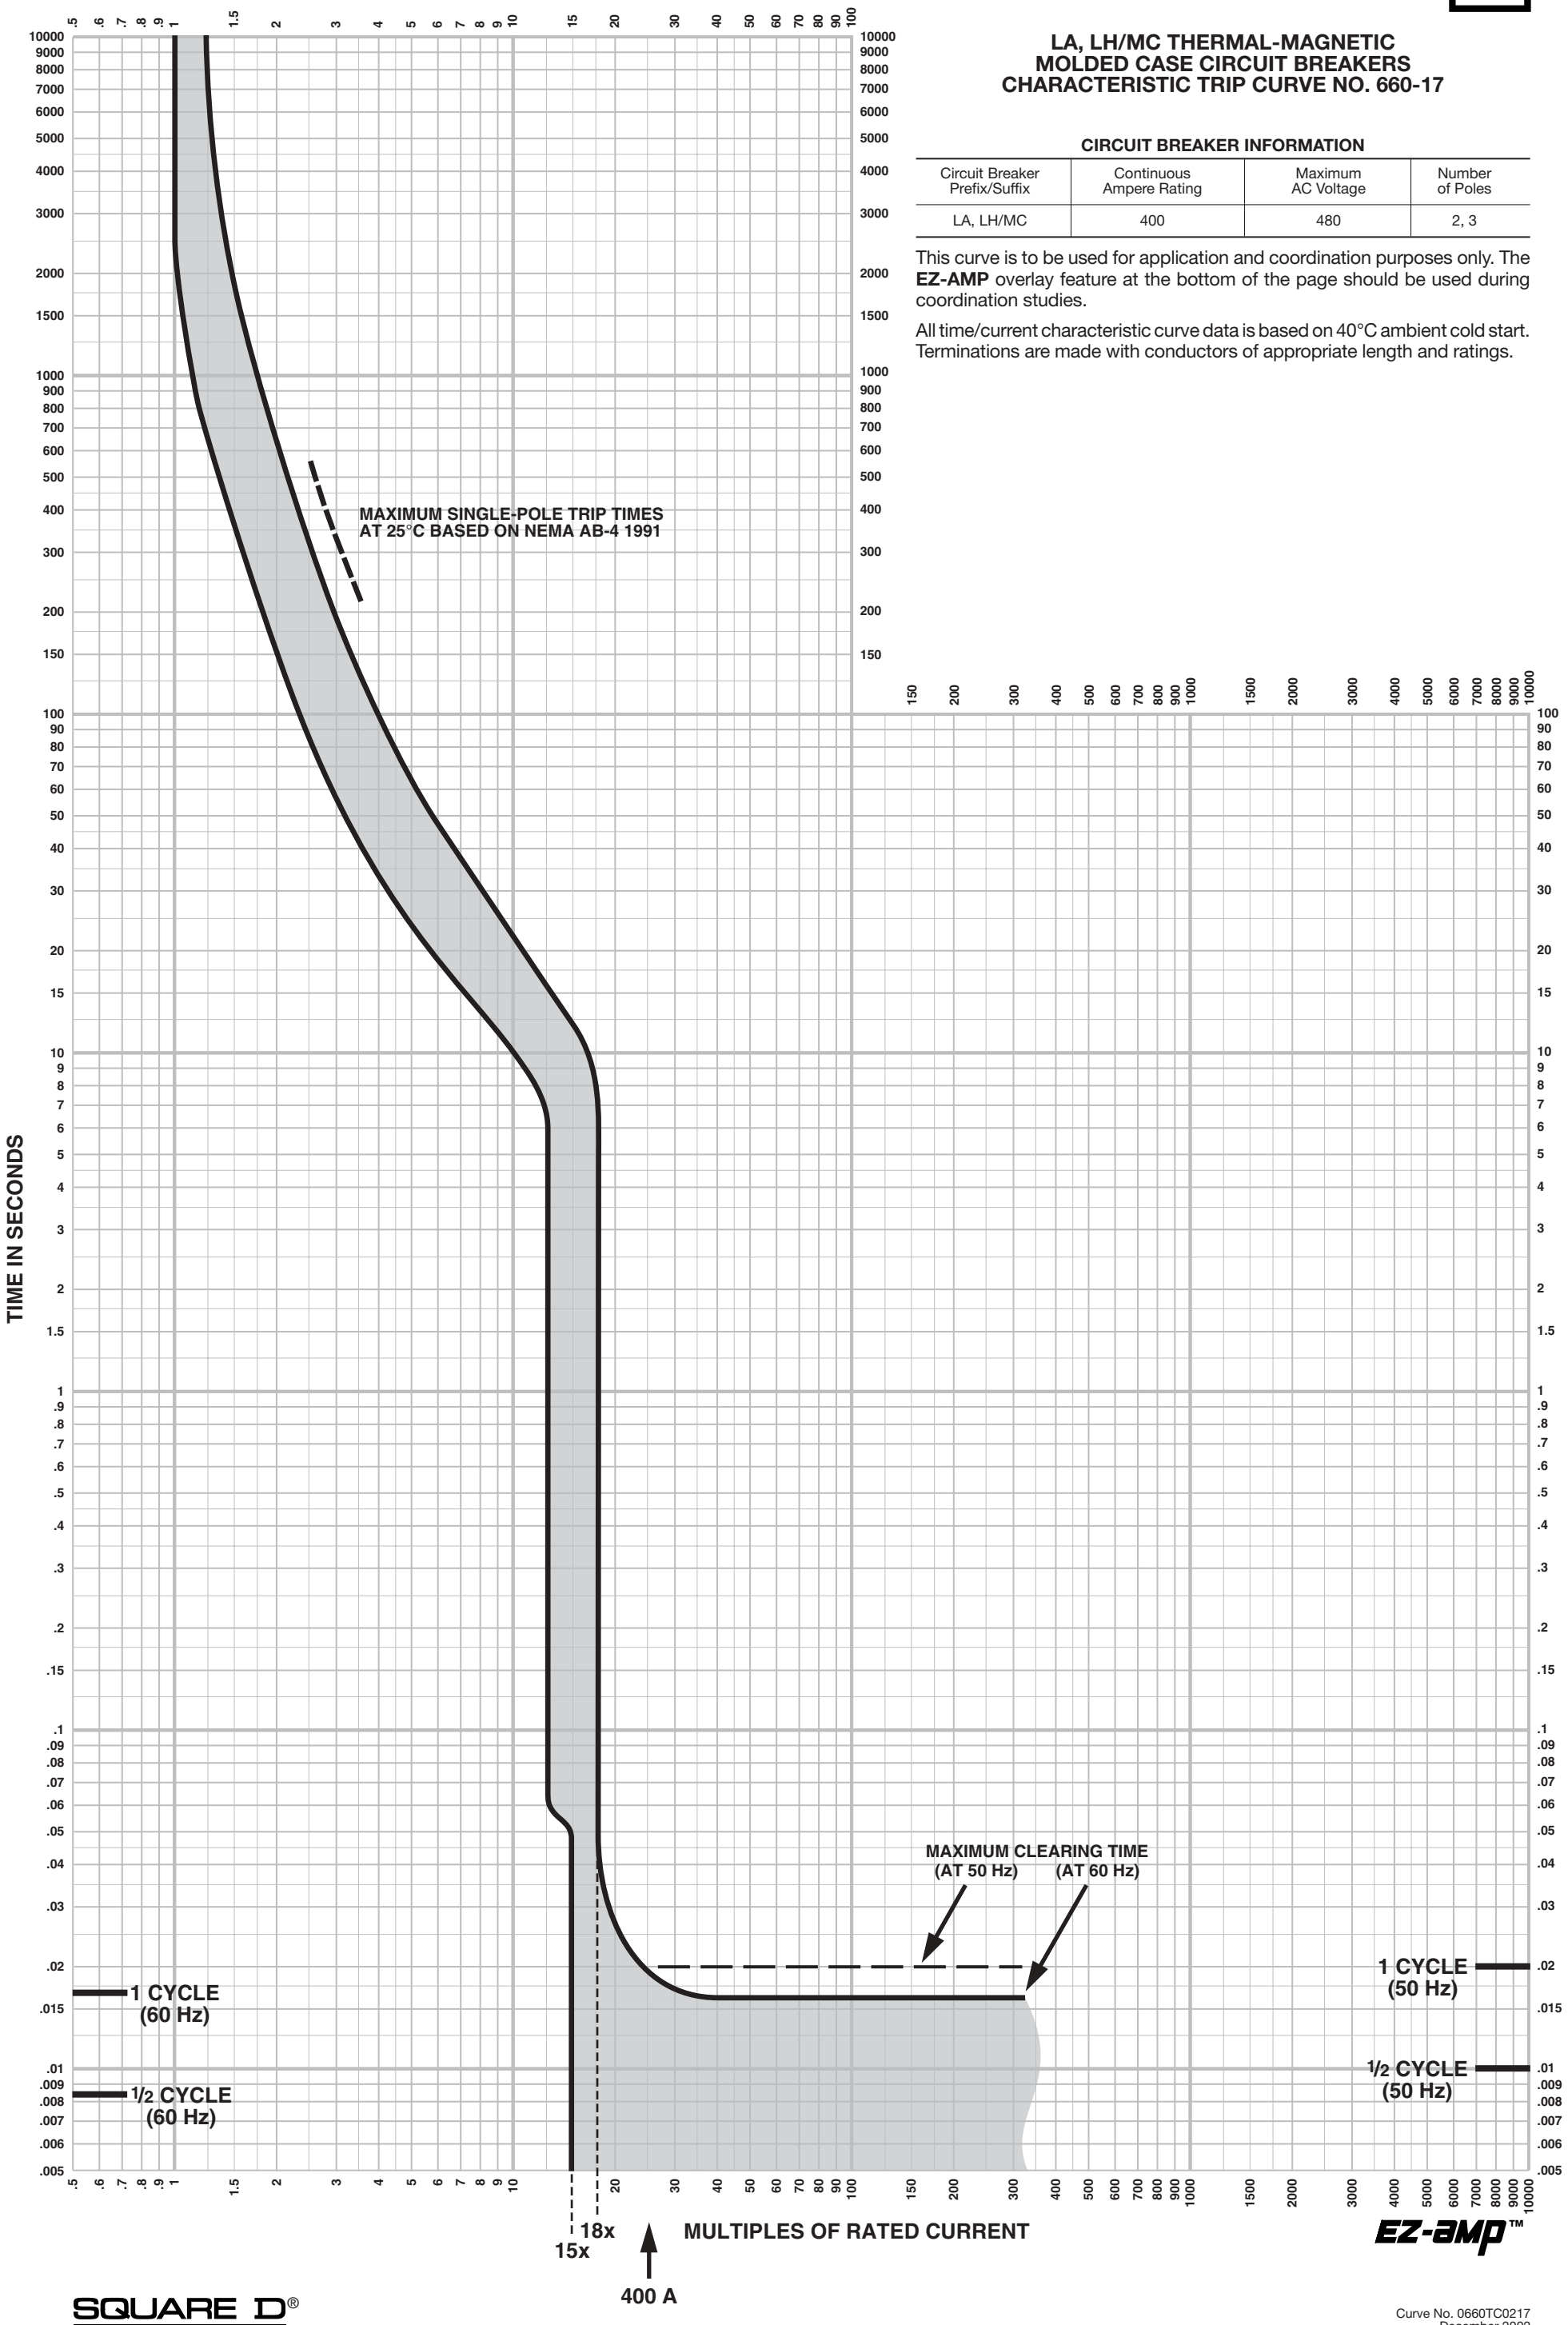

SQUARE D®

© 2002 Schneider Electric all rights reserved

Curve No. 0660TC0217
December 2002
Drawing No. B48095-660-17