Q1 FAMILY MOLDED CASE CIRCUIT BREAKERS
CHARACTERISTIC TRIP CURVE NO 733-6

CIRCUIT BREAKER INFORMATION

Circuit Breaker Prefix	Continuous Ampere Rating	Maximum AC Voltage	Number of Poles
Q1, Q1-VH, Q1H,	110-125	120/240	2
Q1, Q1U	110-125	240	2

This curve is to be used for application and coordination purposes only The **EZ-AMP** overlay feature at the bottom of the page should be used during coordination studies.

All time/current characteristic curve data is based on 40°C ambient cold start. Terminations are made with conductors of appropriate length and ratings.

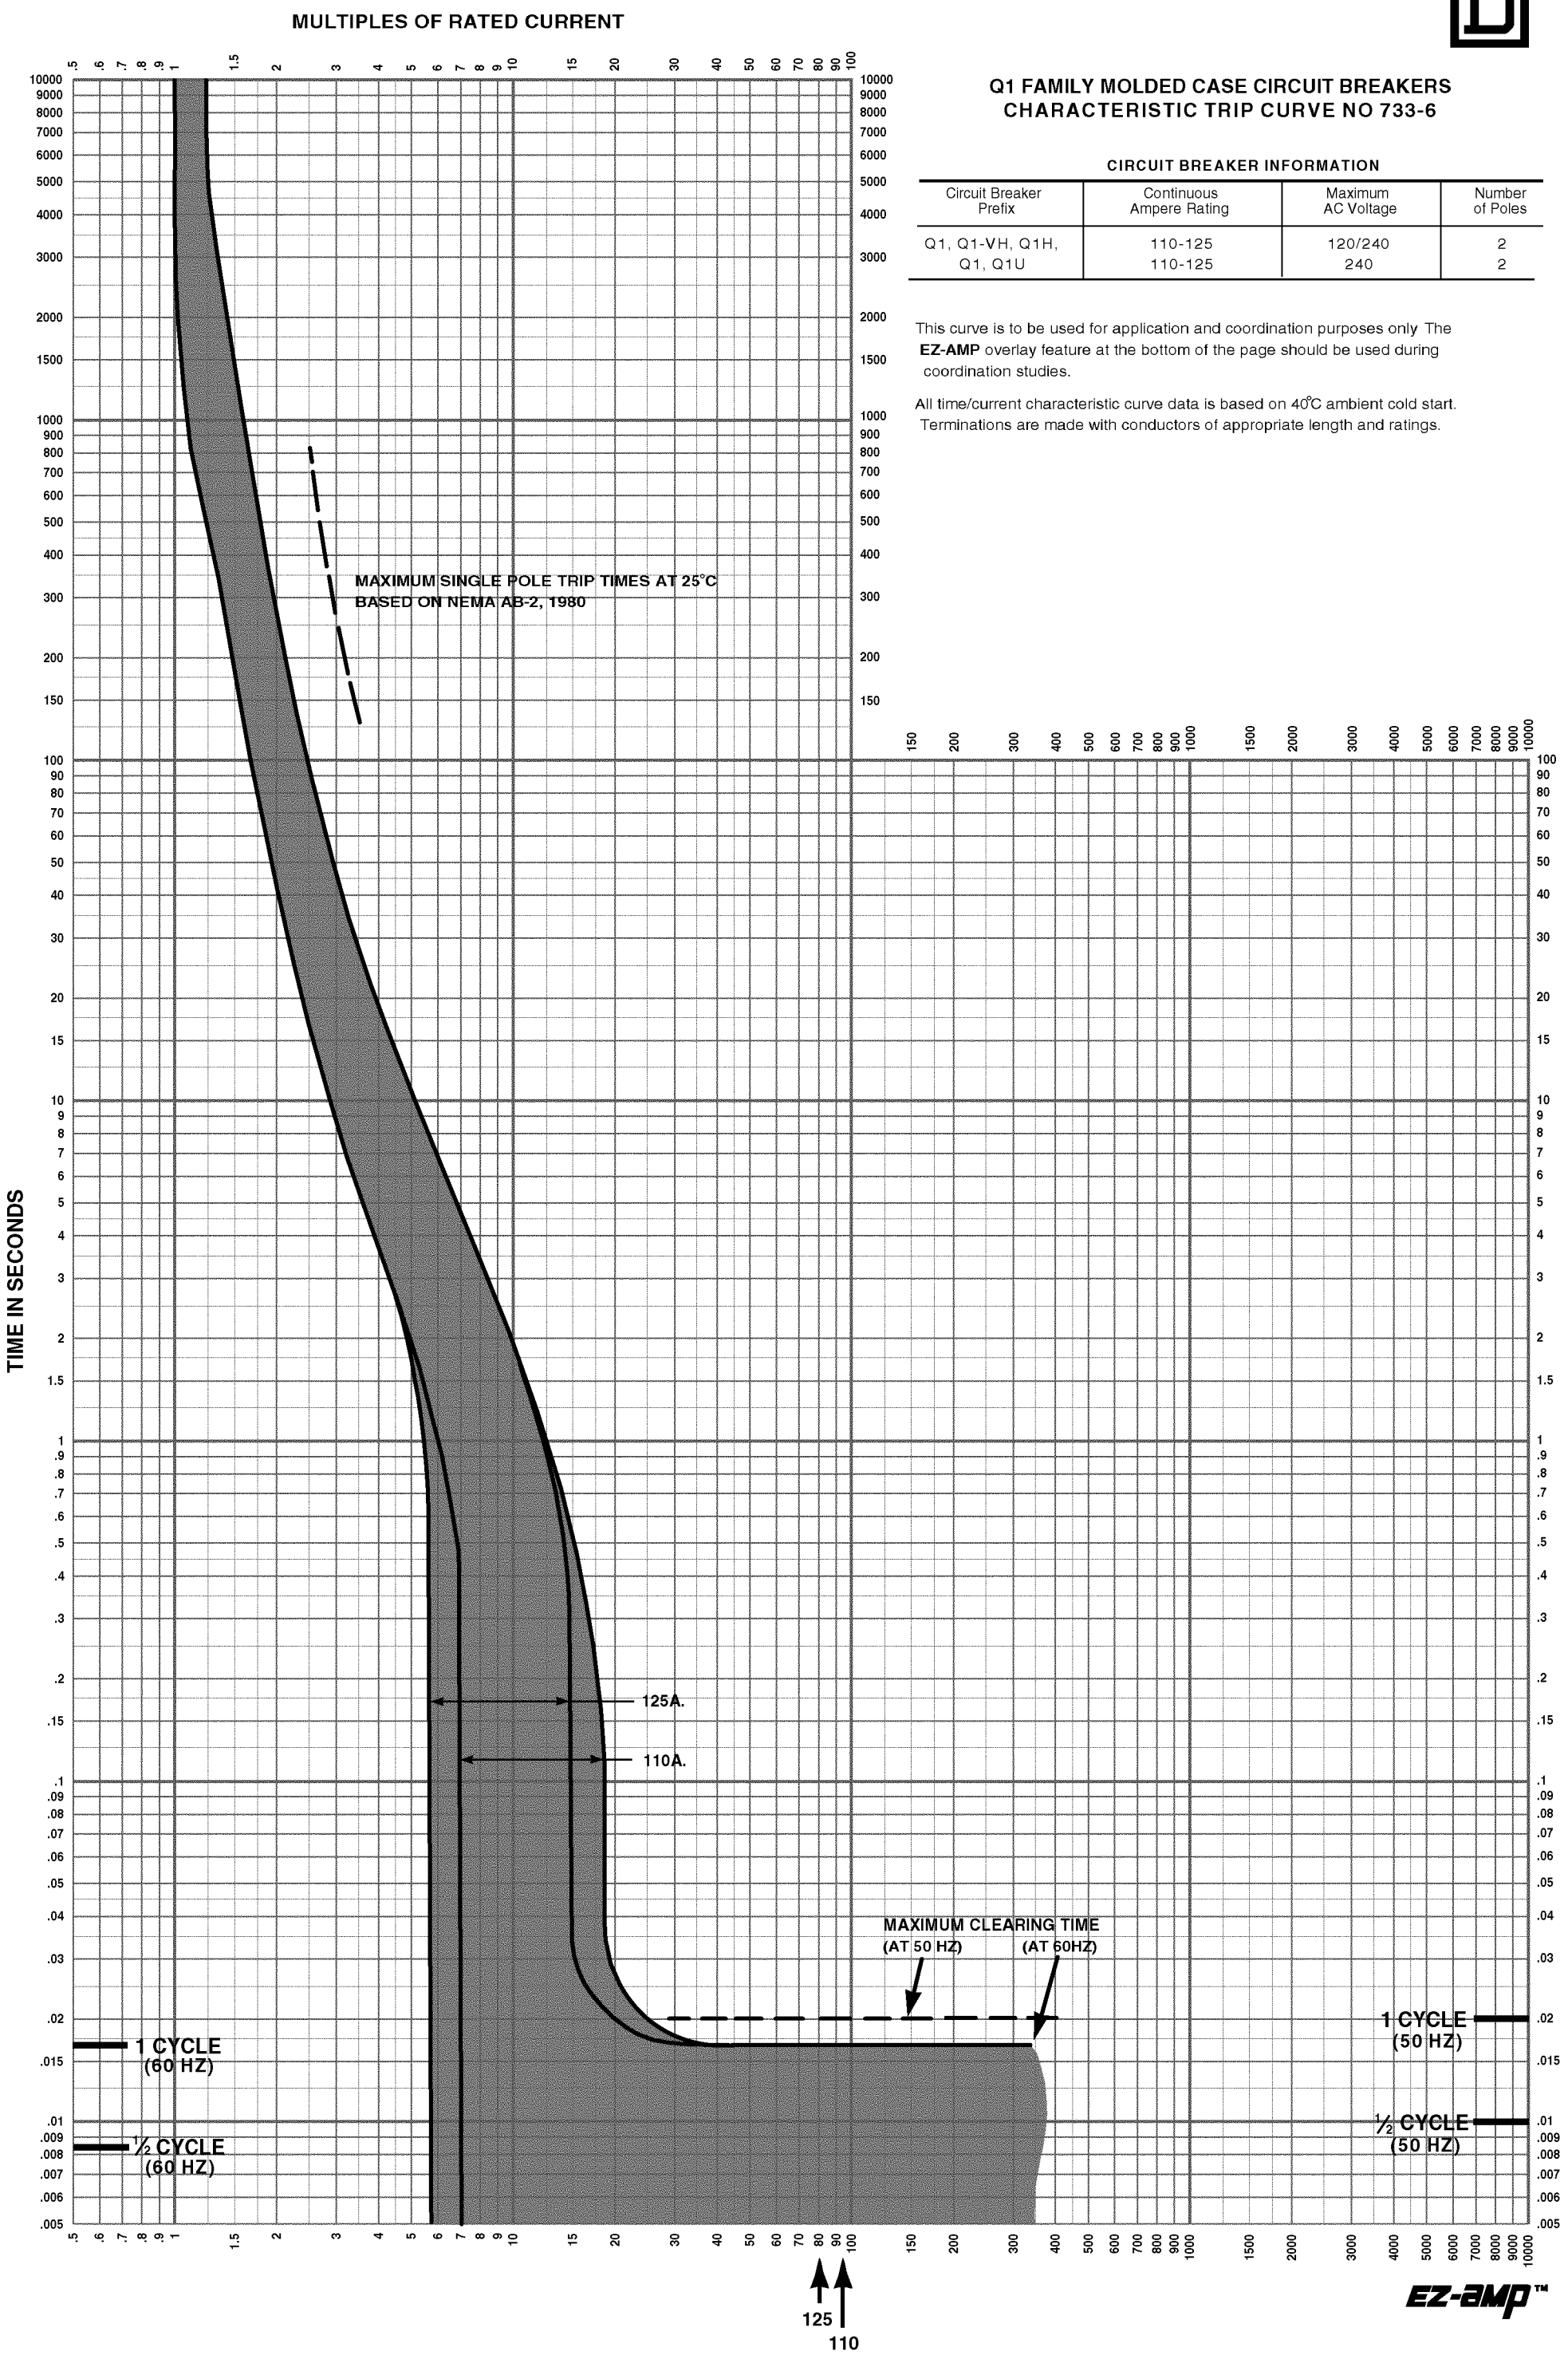

SQUARE D®

©1985 Square D Company

MULTIPLES OF RATED CURRENT

Curve No.733-6
May, 1985